

REDSOLAR

P series Monocrystalline Module

CETC-320-340M(H)/60



Product
warranty



Linear power
warranty



Severe Weather Resilience



Low Light Performance



Anti PID Guarantee



Self Cleaning



CE



320-340W

Output power

21.1%

Maximum efficiency

0~+5W

Power tolerance

Electrical Parameter(STC)

Model	320M	325M	330M	335M	340M
Maximum power (W)	320	325	330	335	340
Working point voltage (V)	33.60	33.90	34.20	34.45	34.72
Working point current (A)	9.52	9.59	9.66	9.74	9.81
Open circuit voltage (V)	40.40	40.70	41.00	41.30	41.60
Short circuit current (A)	10.01	10.08	10.16	10.23	10.30
PV module efficiency	19.39%	19.69%	20.00%	20.30%	20.60%
Standard test conditions	Atmospheric quality Am1.5, Irradiance 1000w/m ² , Cell Temperature 25°C				

Electrical Parameter(NMOT)

Model	320M	325M	330M	335M	340M
Maximum power (W)	237.0	241.2	244.6	248.5	252.4
Working point voltage (V)	31.10	31.40	31.60	31.90	32.20
Working point current (A)	7.62	7.68	7.74	7.79	7.84
Open circuit voltage (V)	37.50	37.80	38.00	38.30	38.50
Short circuit current (A)	8.09	8.14	8.21	8.26	8.32
NMOT conditions	The irradiance is 800w/m ² , the ambient temperature is 20 degrees, and the wind speed is 1m/s				

Mechanical Parameters

Module size	1657*996*35mm
Number of solar cells	60Cells (6*10)
Weight	18Kg ±5%
Junction Box	IP67, MC4 compatible
Cables	4mm ² , 900mm, (Customizable)
Front plate glass	3.2mm, Ultra white & Minus reflection film toughened glass
Static load on the front	5400Pa
Static load on the back	2400Pa

Packaging&Transport

40'HQ container transport	31 Pcs/box × 28 box = 868 Pcs
17.5m truck transport	32 Pcs/box × 40 box = 1280 Pcs


Temperature Parameter

NMOT	45±2°C
Temperature coefficient of maximum power(Pmax)	-0.37%/°C
Temperature coefficient of open circuit voltage(Voc)	-0.30%/°C
Temperature coefficient of short circuit current(Isc)	+0.050%/°C

Maximum Ratings

Working temperature	-40~+85°C
Maximum system voltage	1500VDC
Maximum fuse rated current	15A

Excellent Power Guarantee

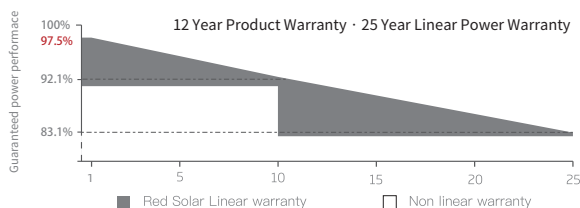


Model of PV Module

CETC-xxxM(H)/60


Power Range

320-340W


PV module dimensions (mm)

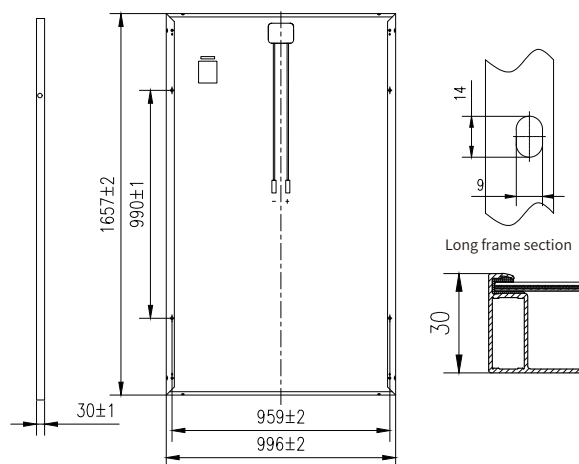

组件的P-V曲线/P-V Curves of PV Module

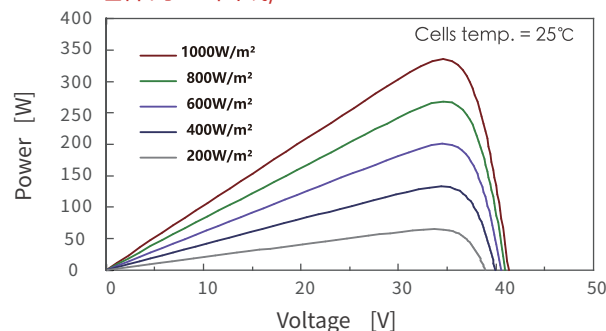

组件的I-V曲线/I-V Curves of PV Module

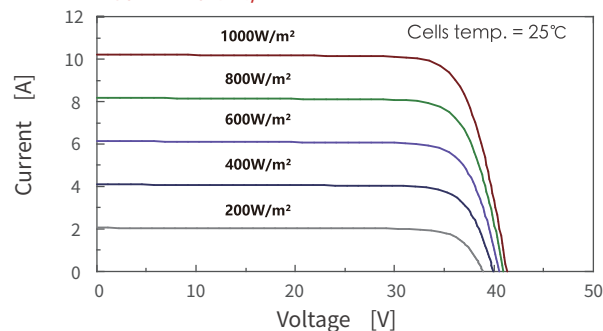

No. 586 Tongzipowest Road, High-Tech Development Zone, Changsha City, Hunan Province

<https://red-solar.com/> ☎ +400 963 1580 +86 0731 8998 0608

All data contained in this specification are subject to change without prior notice. The final interpretation rights belong to Hunan Red Solar New Energy Science and Technology Co.,Ltd (202506v01)