

## M10-MBB Mono Flexible PV Module

26 Half Cells



10 years Product warranty



25 years Linear power warranty

Integrated Solar Manufacturing & Technology Since 1964



### 90-95W

/Output power



#### PID Resistant Guarantee

Strict selection of encapsulation materials eliminates PID risk.

### 17.4%

/Maximum efficiency



#### Severe Weather Resilience

Withstand outdoor ultraviolet irradiation, high and low temperature changes, stable output efficiency

### 0~+5W

/Power tolerance



#### Soft and light

Flexible photovoltaic modules have extremely low weight, bending characteristics, easy installation, high space utilization, and adapt to the needs of multiple scenarios.




#### Multi Busbar Technology

Better light utilization and current collection ability, effectively improve the power output and reliability.

#### Comprehensive product certification

- IEC TS 62941 (PV quality Management System)
- ISO9001: 2015 (Quality Management System)
- ISO14001 (Environmental Management System)
- OHSAS18001 (Occupational Health and Safety Management System)

#### Excellent Power Guarantee

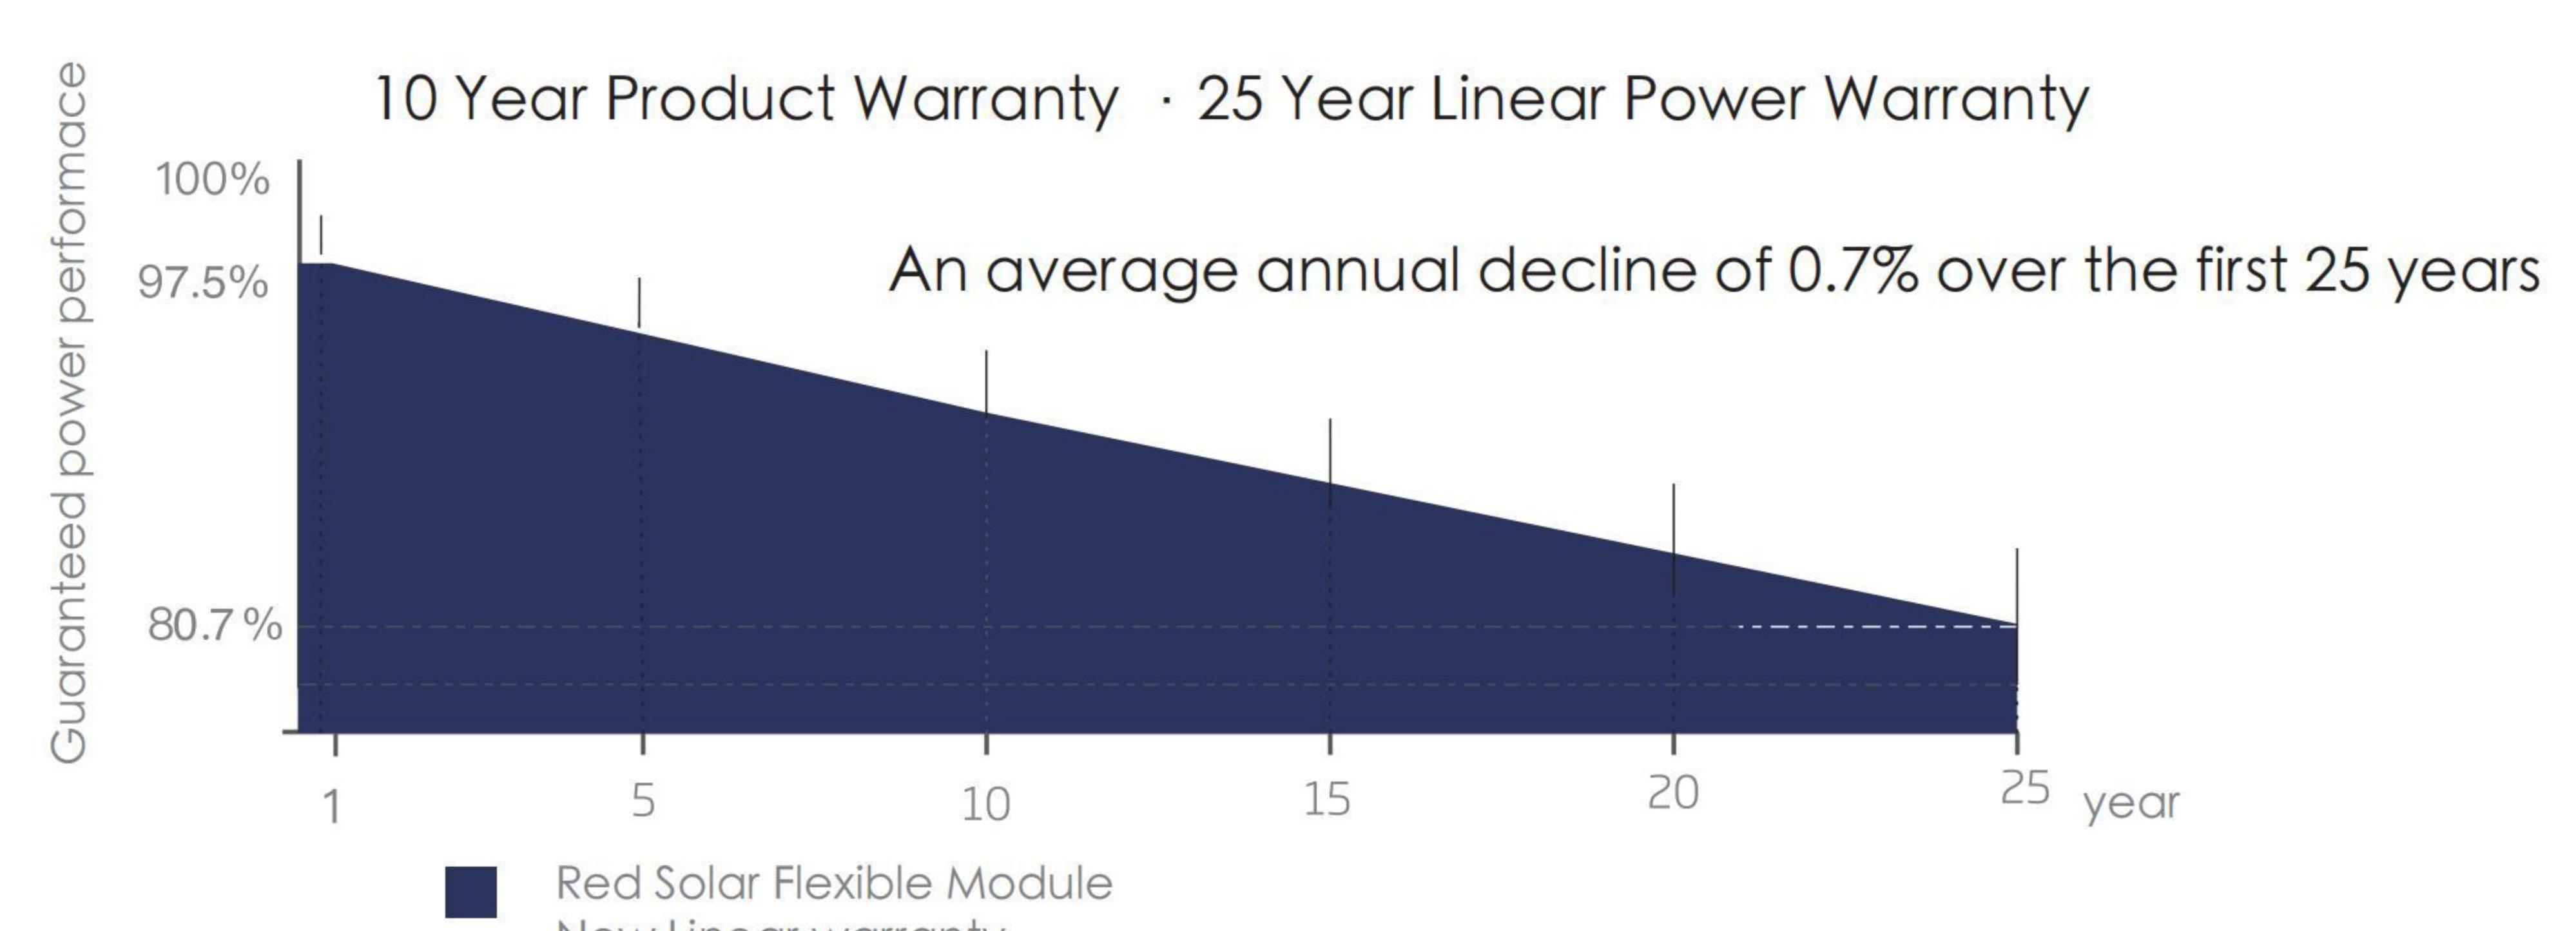


### Model of PV Module

CETC-xxxM(LB)/26


### Power Range

90-95W


PV module dimensions (mm)

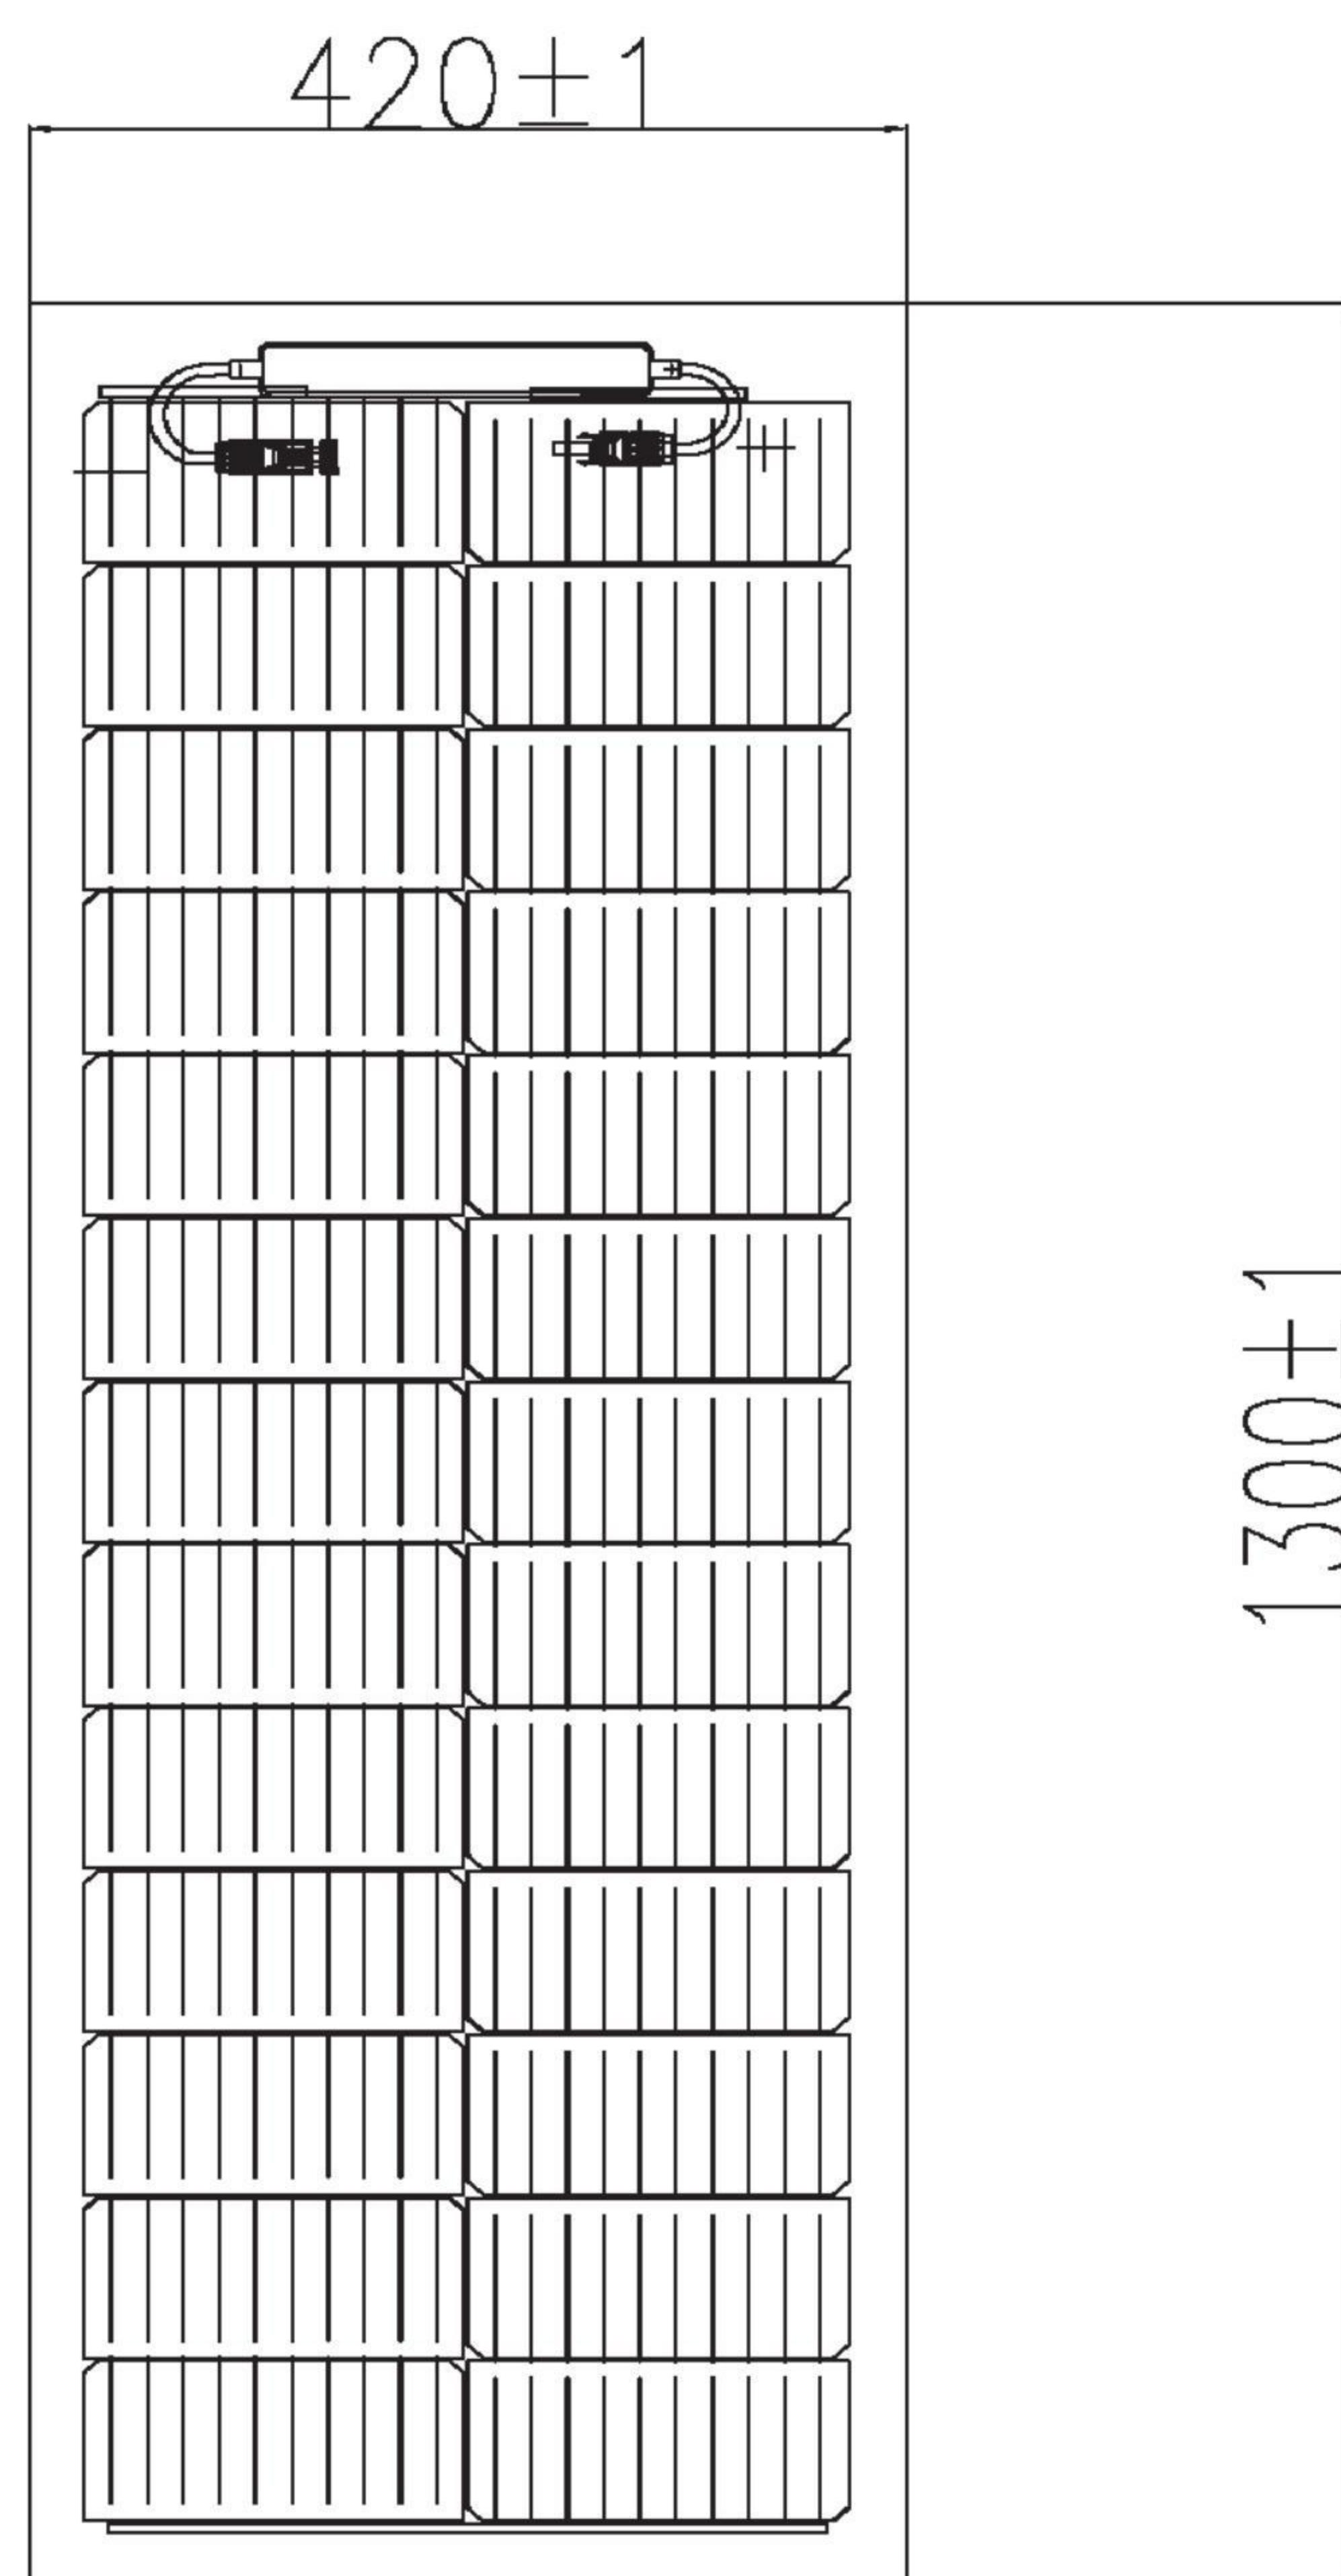

### P-V Curves of PV Module

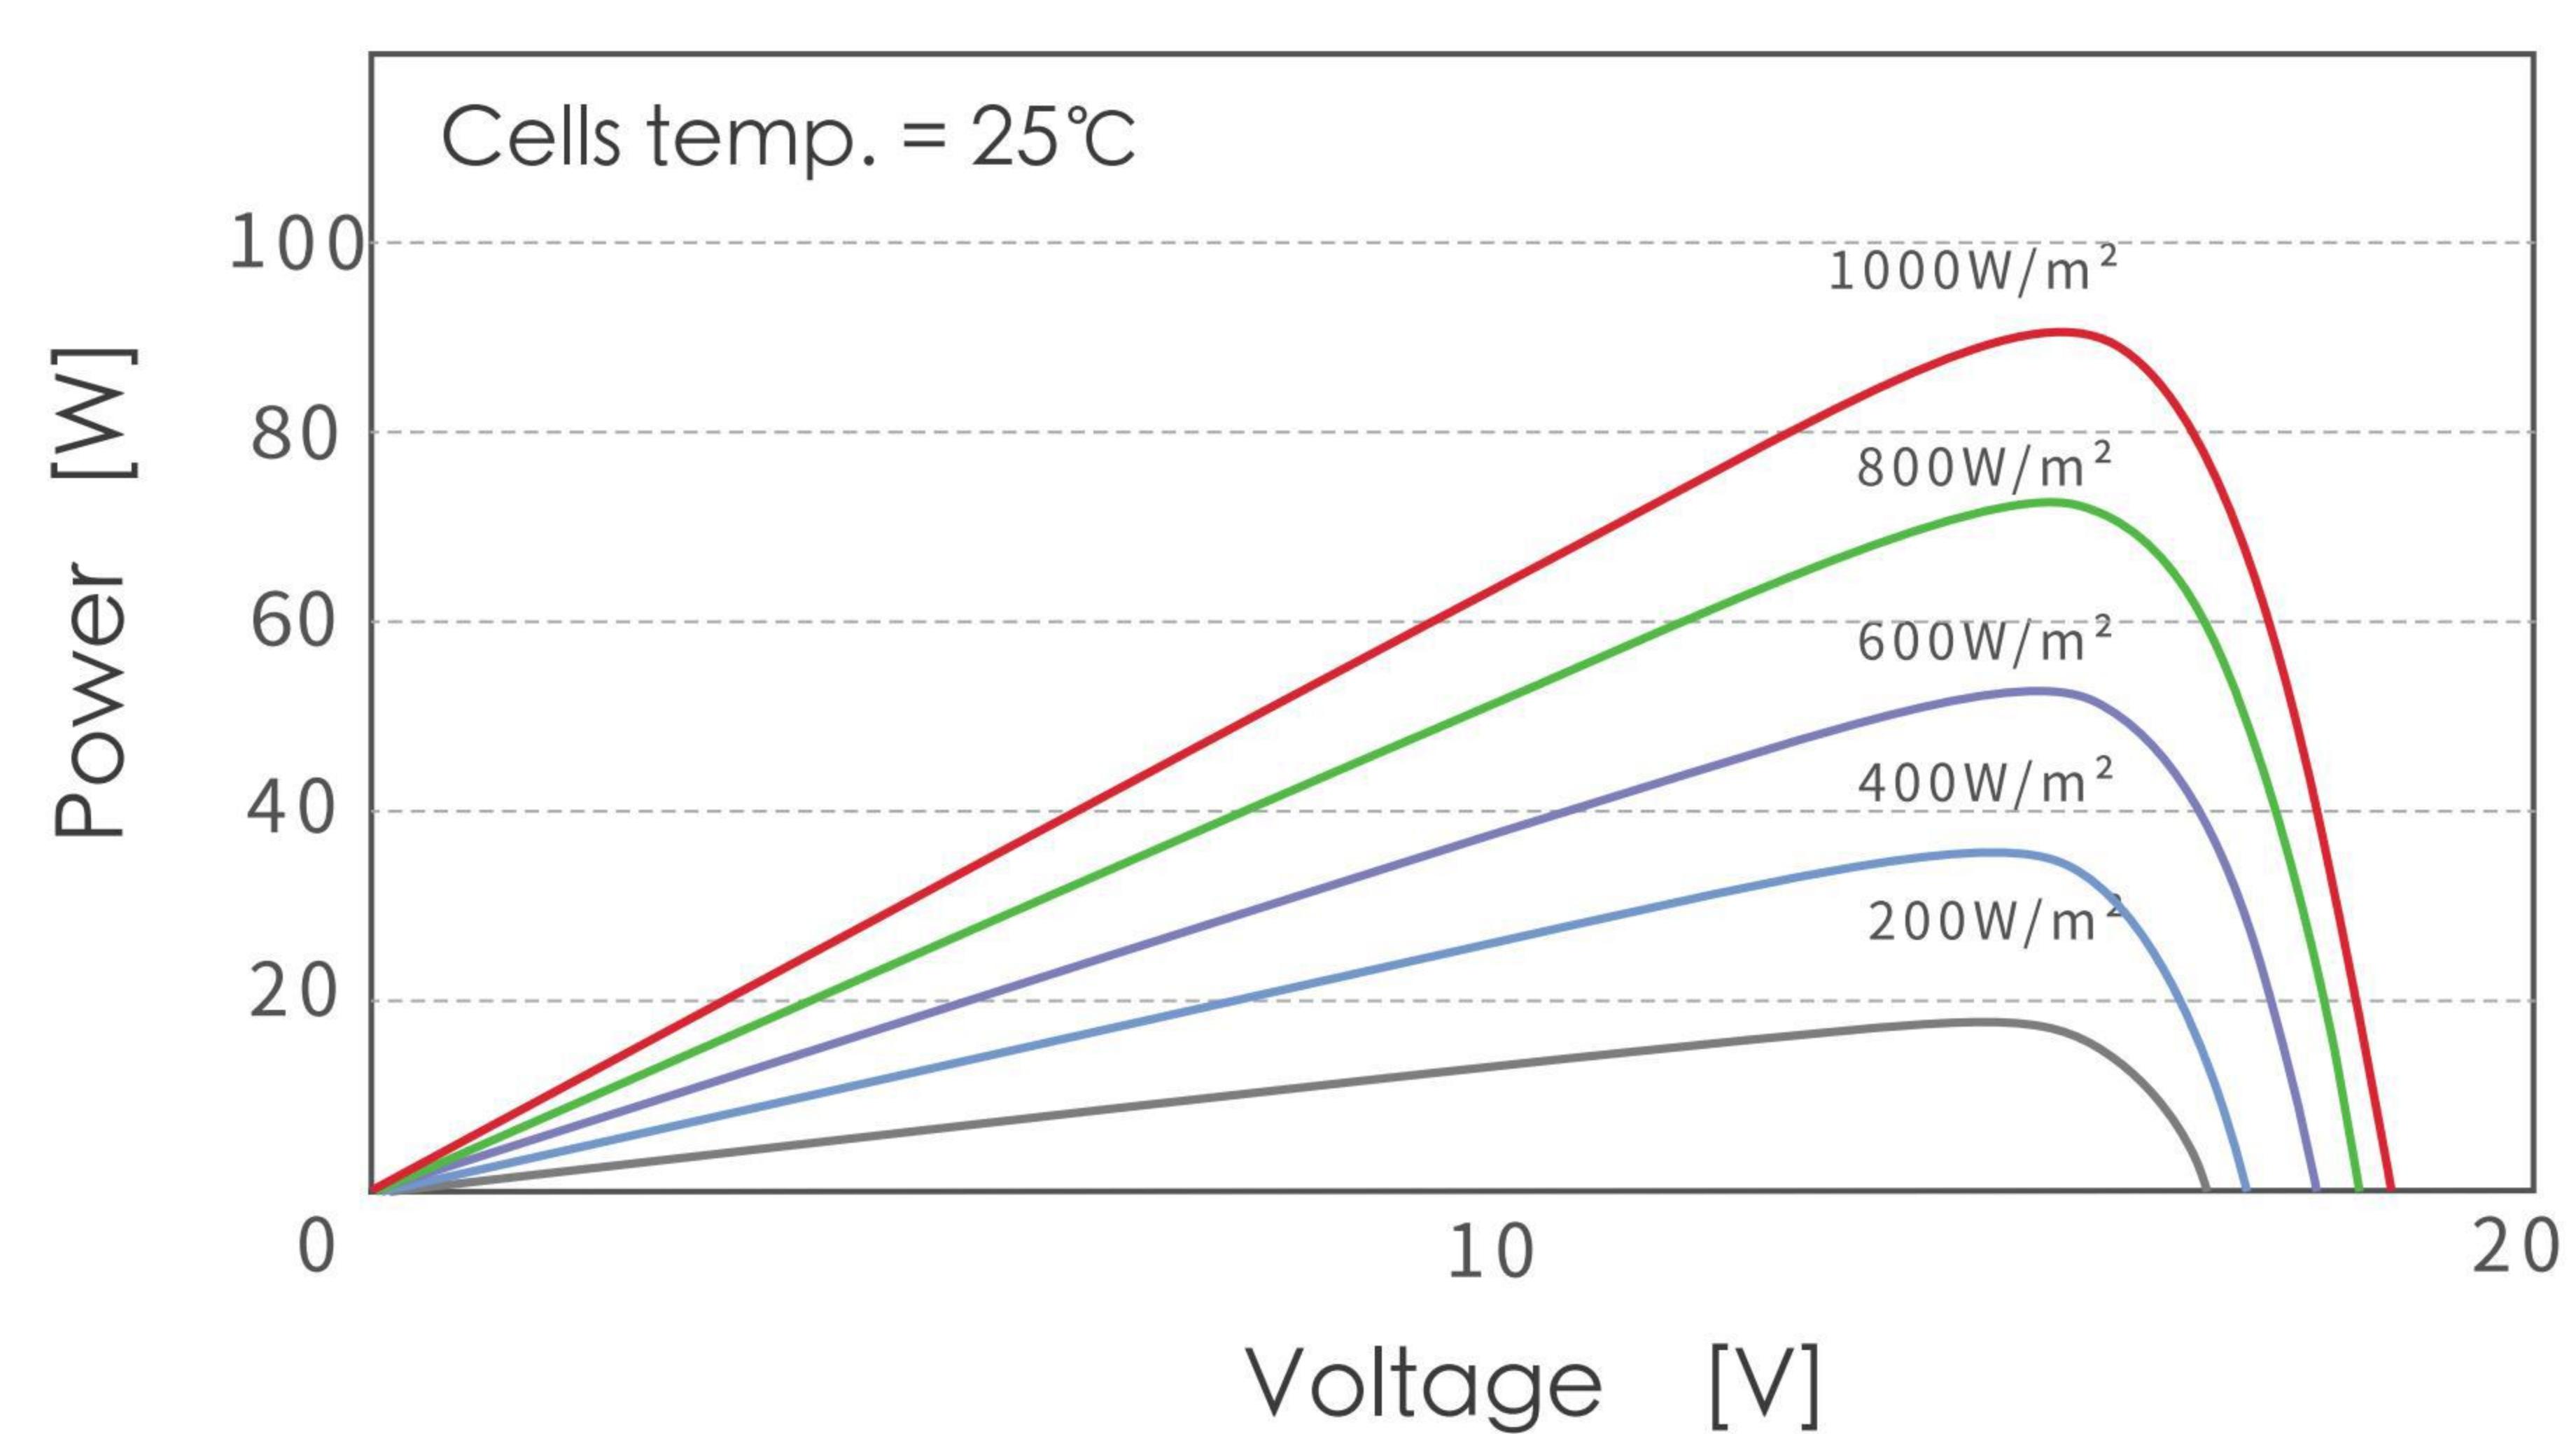

### I-V Curves of PV Module

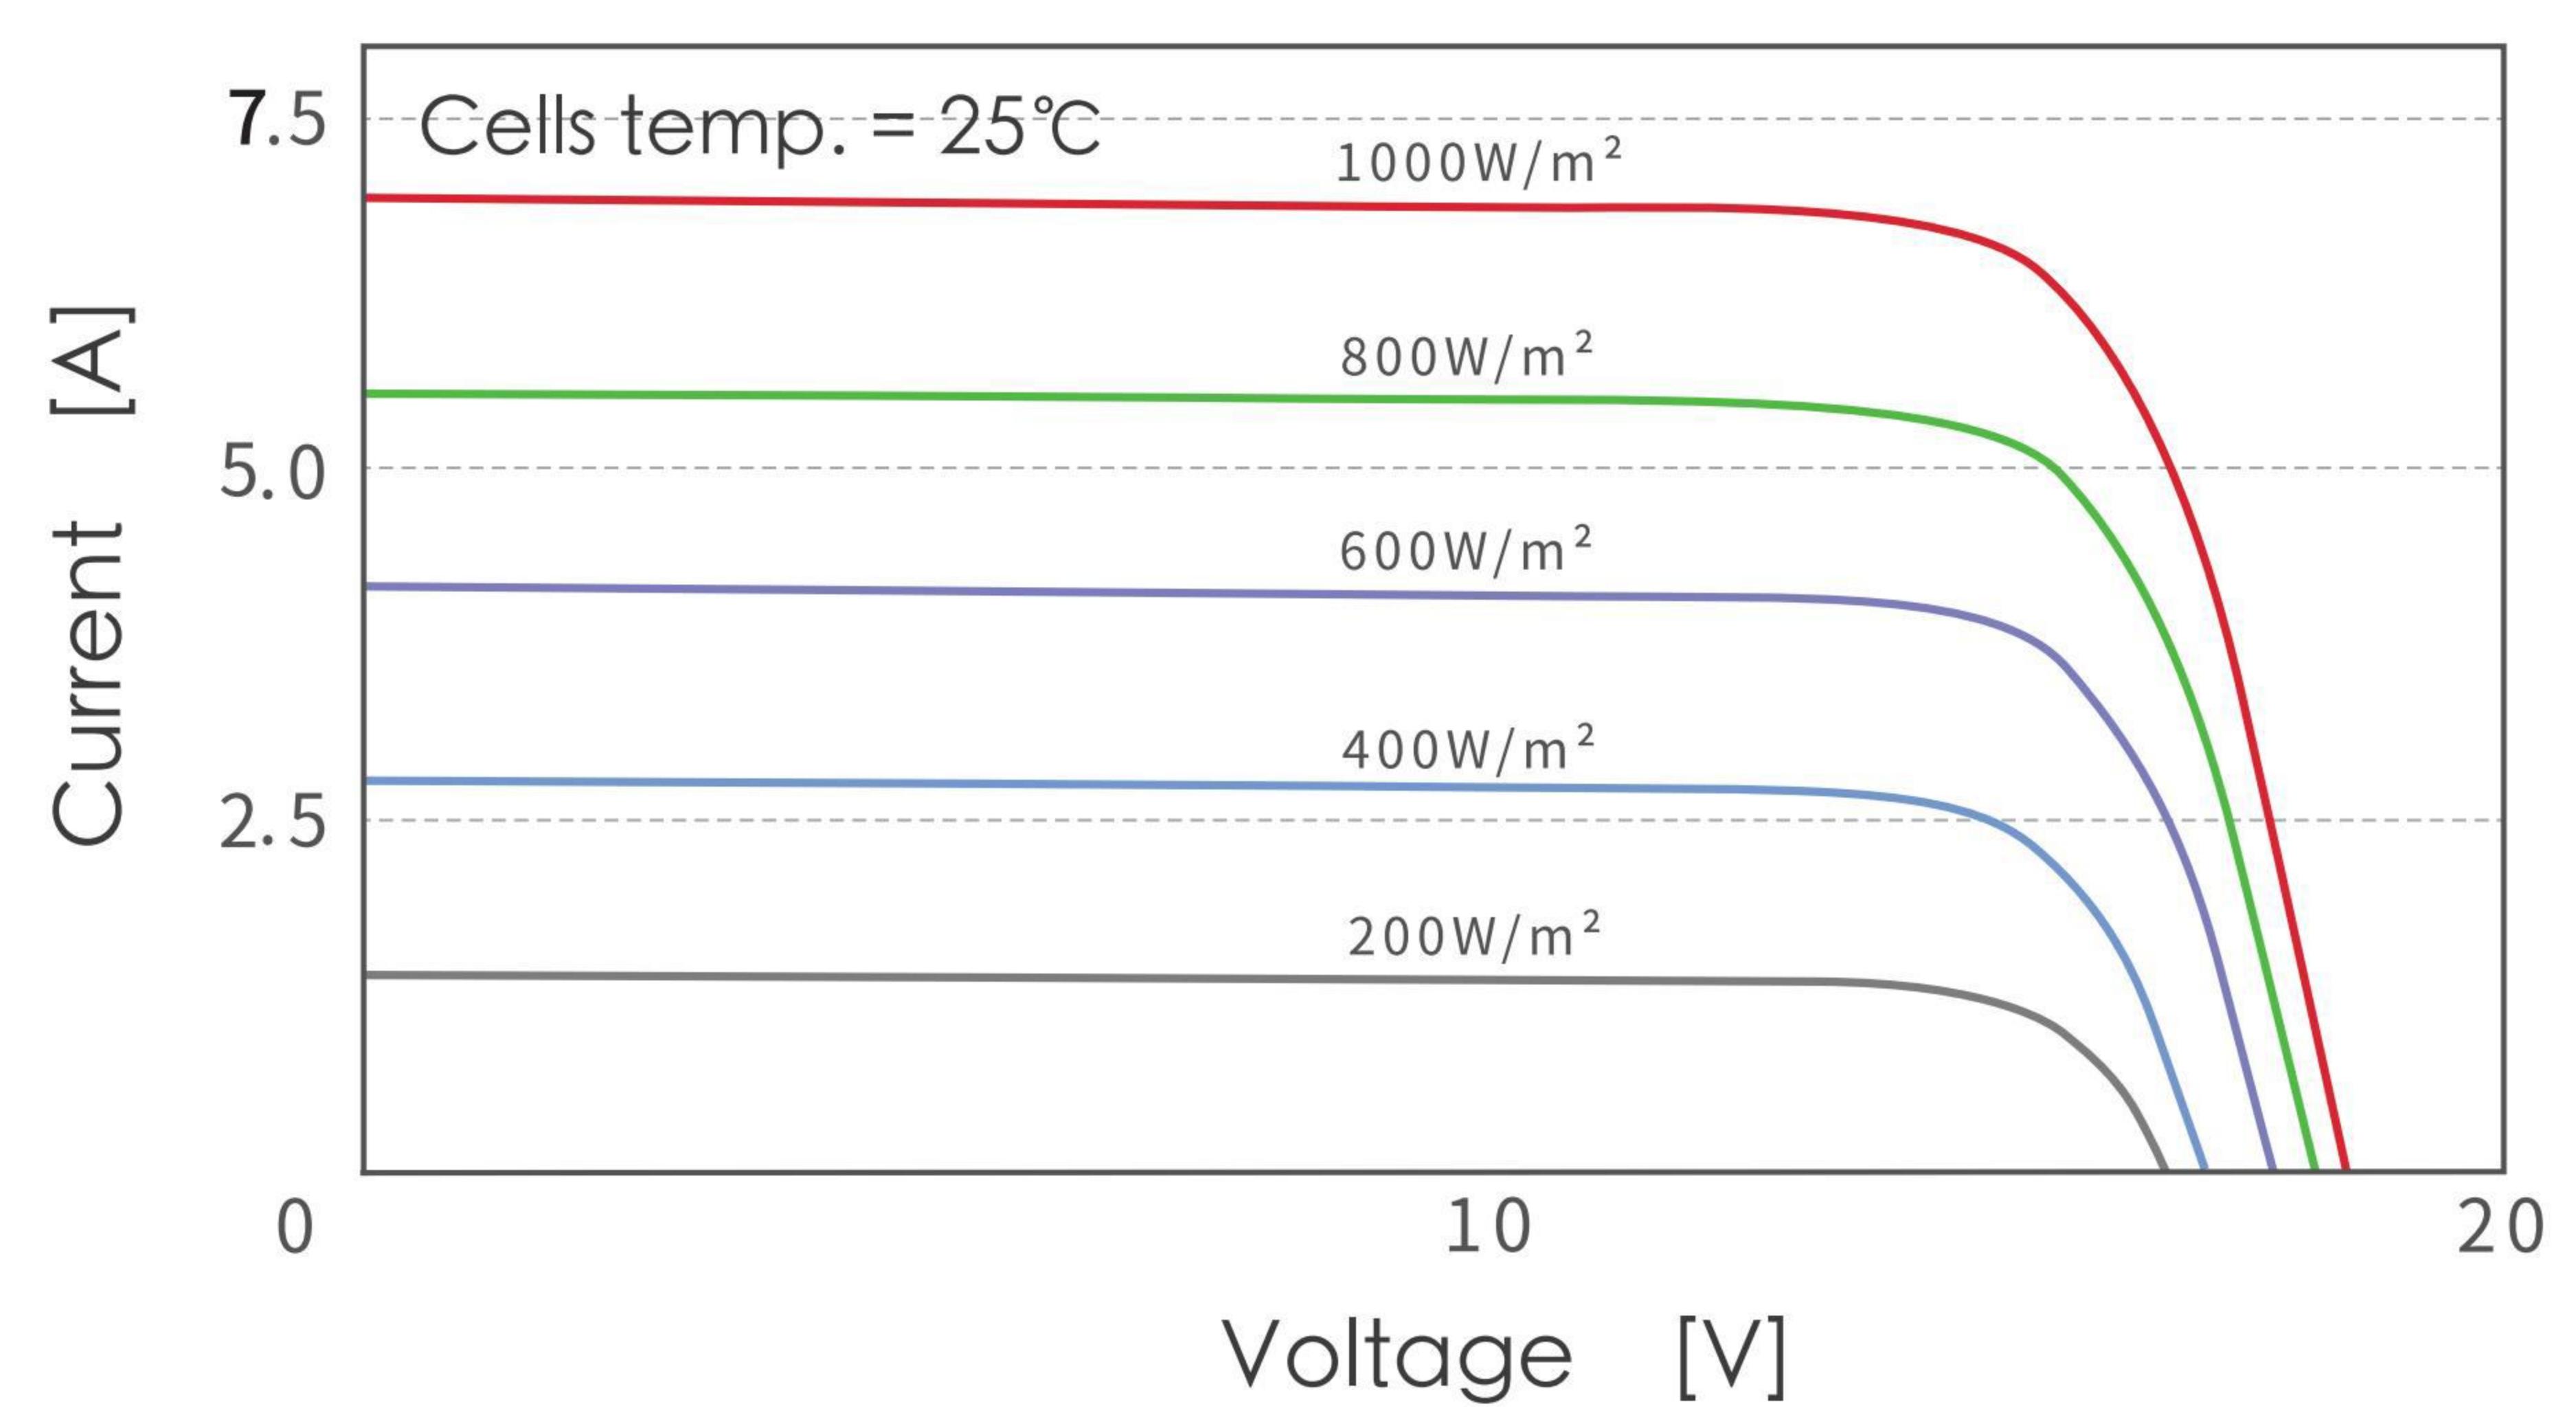

### Electrical Parameter(STC)

Model	90M	95M
Maximum power (W)	90	95
Working point voltage (V)	14.45	15.18
Working point current (A)	6.23	6.26
Open circuit voltage (V)	17.91	17.93
Short circuit current (A)	6.59	6.64
PV module efficiency	16.48%	17.40%
Standard test conditions	Atmospheric quality Am1.5, Irradiance 1000w/ m <sup>2</sup> , Cell Temperature 25°C	

### Electrical Parameter(NOCT)

Model	90M	95M
Maximum power (W)	67	71
Working point voltage (V)	13.14	13.76
Working point current (A)	5.09	5.14
Open circuit voltage (V)	16.57	16.59
Short circuit current (A)	5.32	5.37
NOCT conditions	The irradiance is 800w/ m <sup>2</sup> , the ambient temperature is 20 degrees, and the wind speed is 1m/s	

### Mechanical Parameters

Module size	1300*420*18.8mm
Number of solar cells	26Cells (2*13)
Weight	2Kg ±5%
Junction Box	IP68, 1 diodes
Cables	4mm <sup>2</sup> , 300mm, (Customizable)
Front plate	High light transmittance flexible polymer material
Frame	no frame
Colour	white or black

### Packaging&Transport

40'HQ container transport	46 Pcs/box × 72 box = 3312 Pcs
---------------------------	--------------------------------

### Temperature Parameter Maximum Ratings

NMOT	45±2°C	Working temperature	-40~+85°C
Temperature coefficient of maximum power(Pmax)	-0.35%/°C	Maximum system voltage	1000/1500VDC
Temperature coefficient of open circuit voltage(Voc)	-0.28%/°C	Maximum fuse rated current	10A
Temperature coefficient of short circuit current(Isc)	+0.05%/°C		



All data contained in this specification are subject to change without prior notice. The final interpretation rights belong to Hunan Red Solar New Energy Science and Technology Co.,Ltd (202308V01)