

REDSOLAR

M10-MBB PERC Flexible PV Module

108 Half Cells




10 years Product warranty



25 years Linear power warranty

Integrated Solar Manufacturing & Technology Since 1964

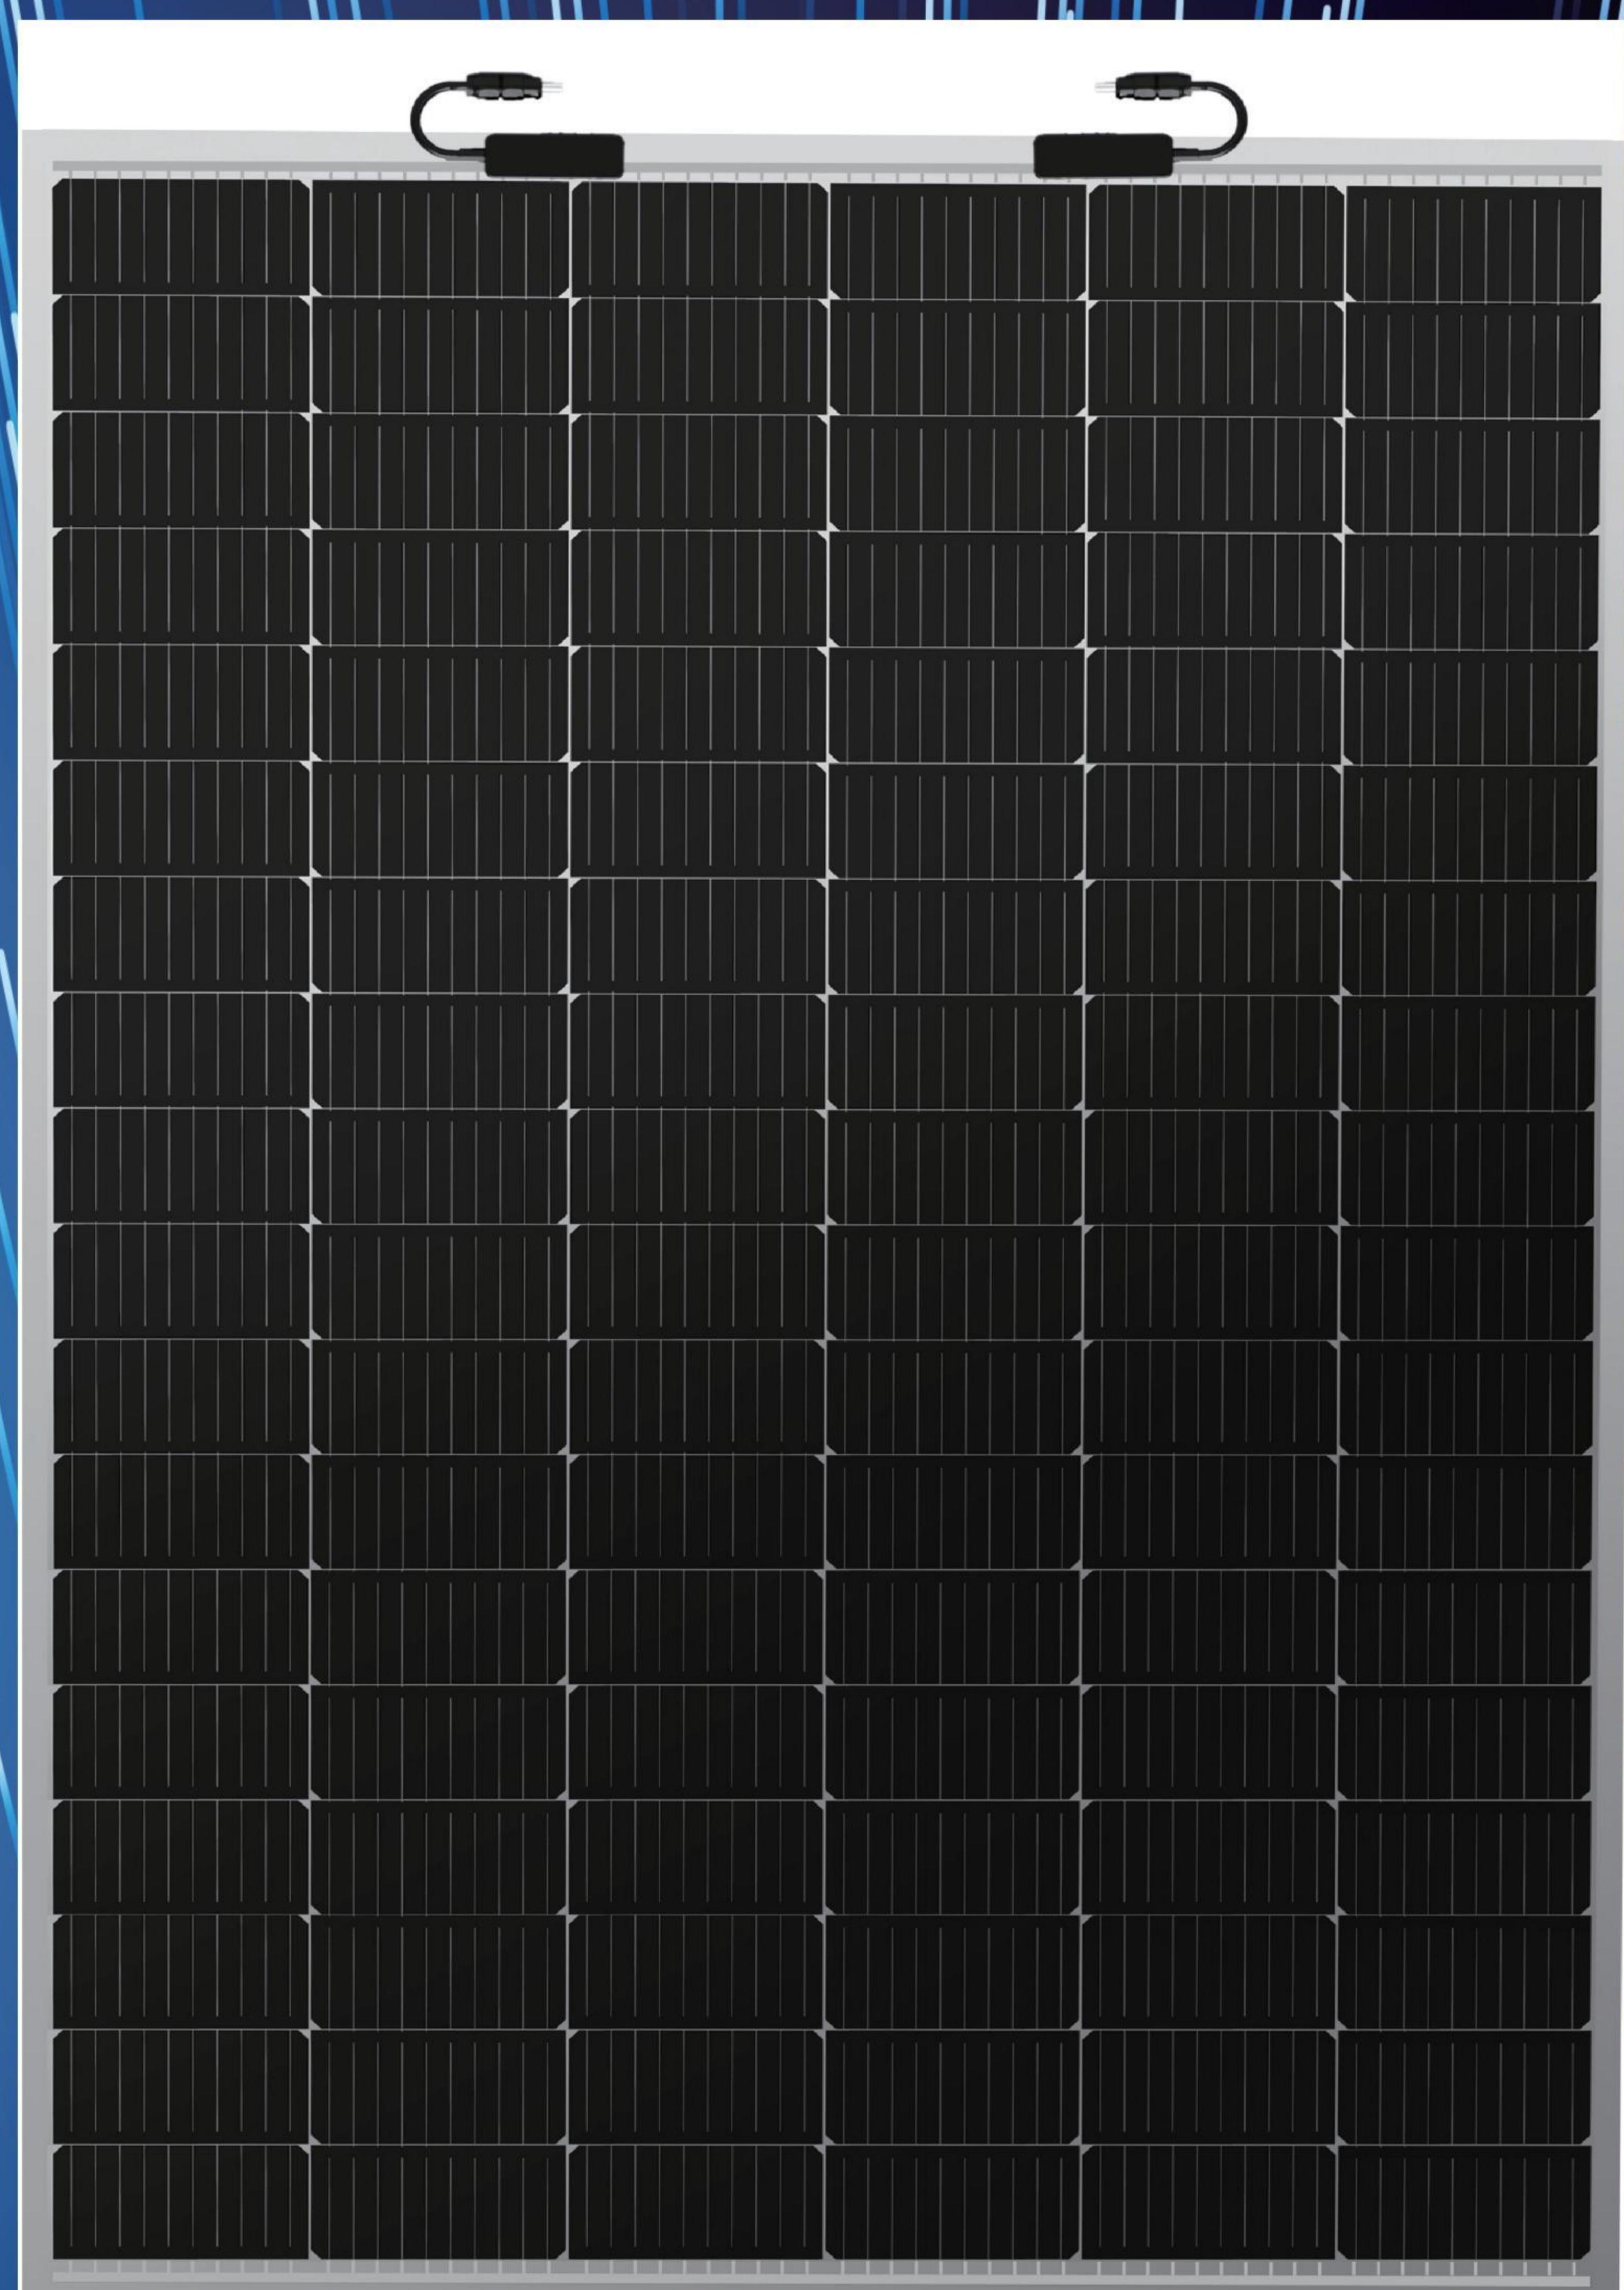

390-400W /Output power



PID Resistant Guarantee

Strict selection of encapsulation materials eliminates PID risk.

20.2% /Maximum efficiency



Severe Weather Resilience

Withstand outdoor ultraviolet irradiation, high and low temperature changes, stable output efficiency

±3%W /Power tolerance



Soft and light

Flexible photovoltaic modules have extremely low weight, bending characteristics, easy installation, high space utilization, and adapt to the needs of multiple scenarios.




Multi Busbar Technology

Better light utilization and current collection ability, effectively improve the power output and reliability.

- IEC TS 62941 (PV quality Management System)
- ISO9001: 2015 (Quality Management System)
- ISO14001 (Environmental Management System)
- OHSAS18001 (Occupational Health and Safety Management System)

Excellent Power Guarantee

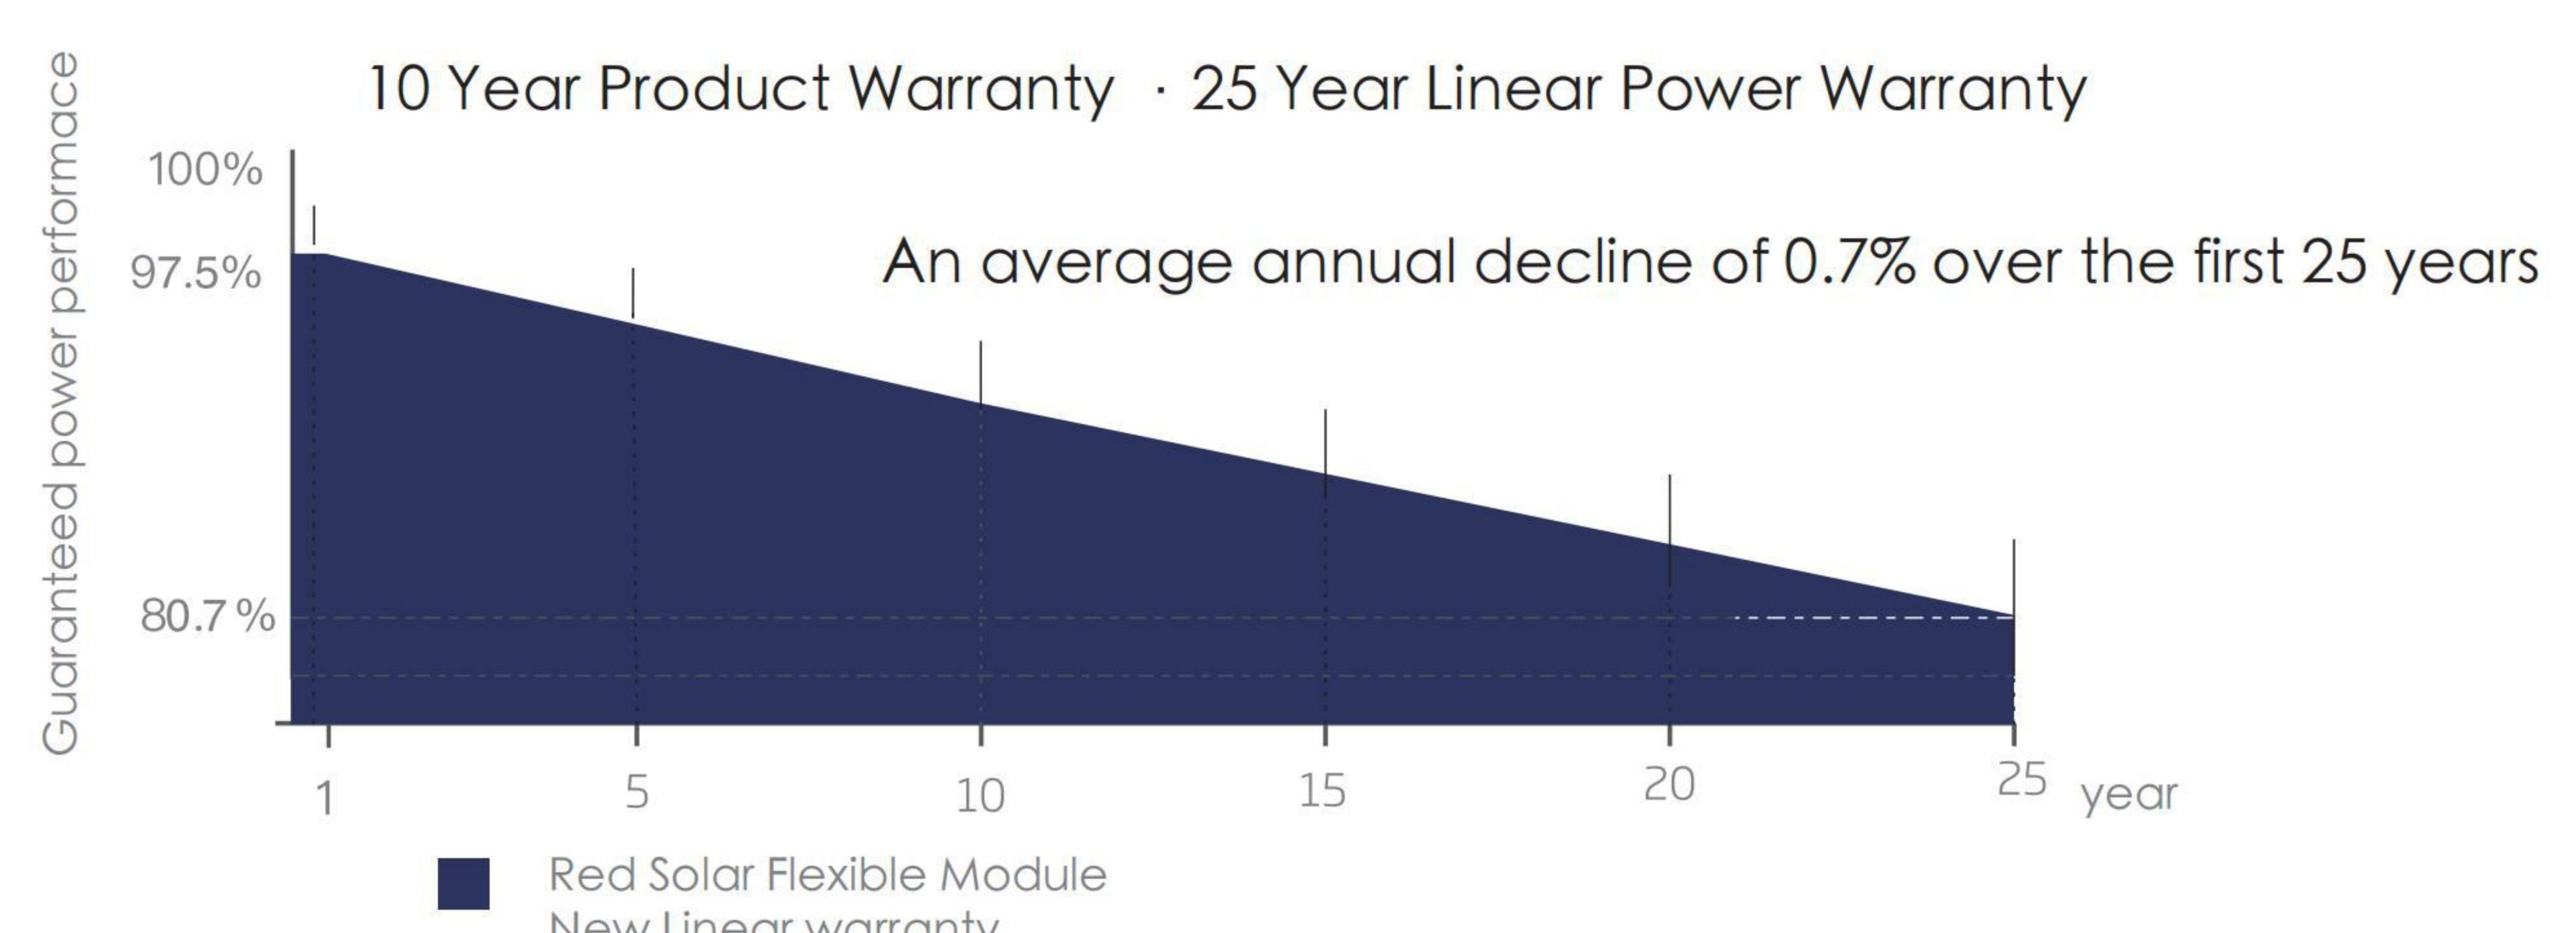

Hunan Red Solar New Energy Science and Technology Co.,Ltd

www.red-solar.com
 sales@red-solar.com




Model of PV Module

CETC-xxxM(LB)/108


Power Range

390-400W


PV module dimensions (mm)

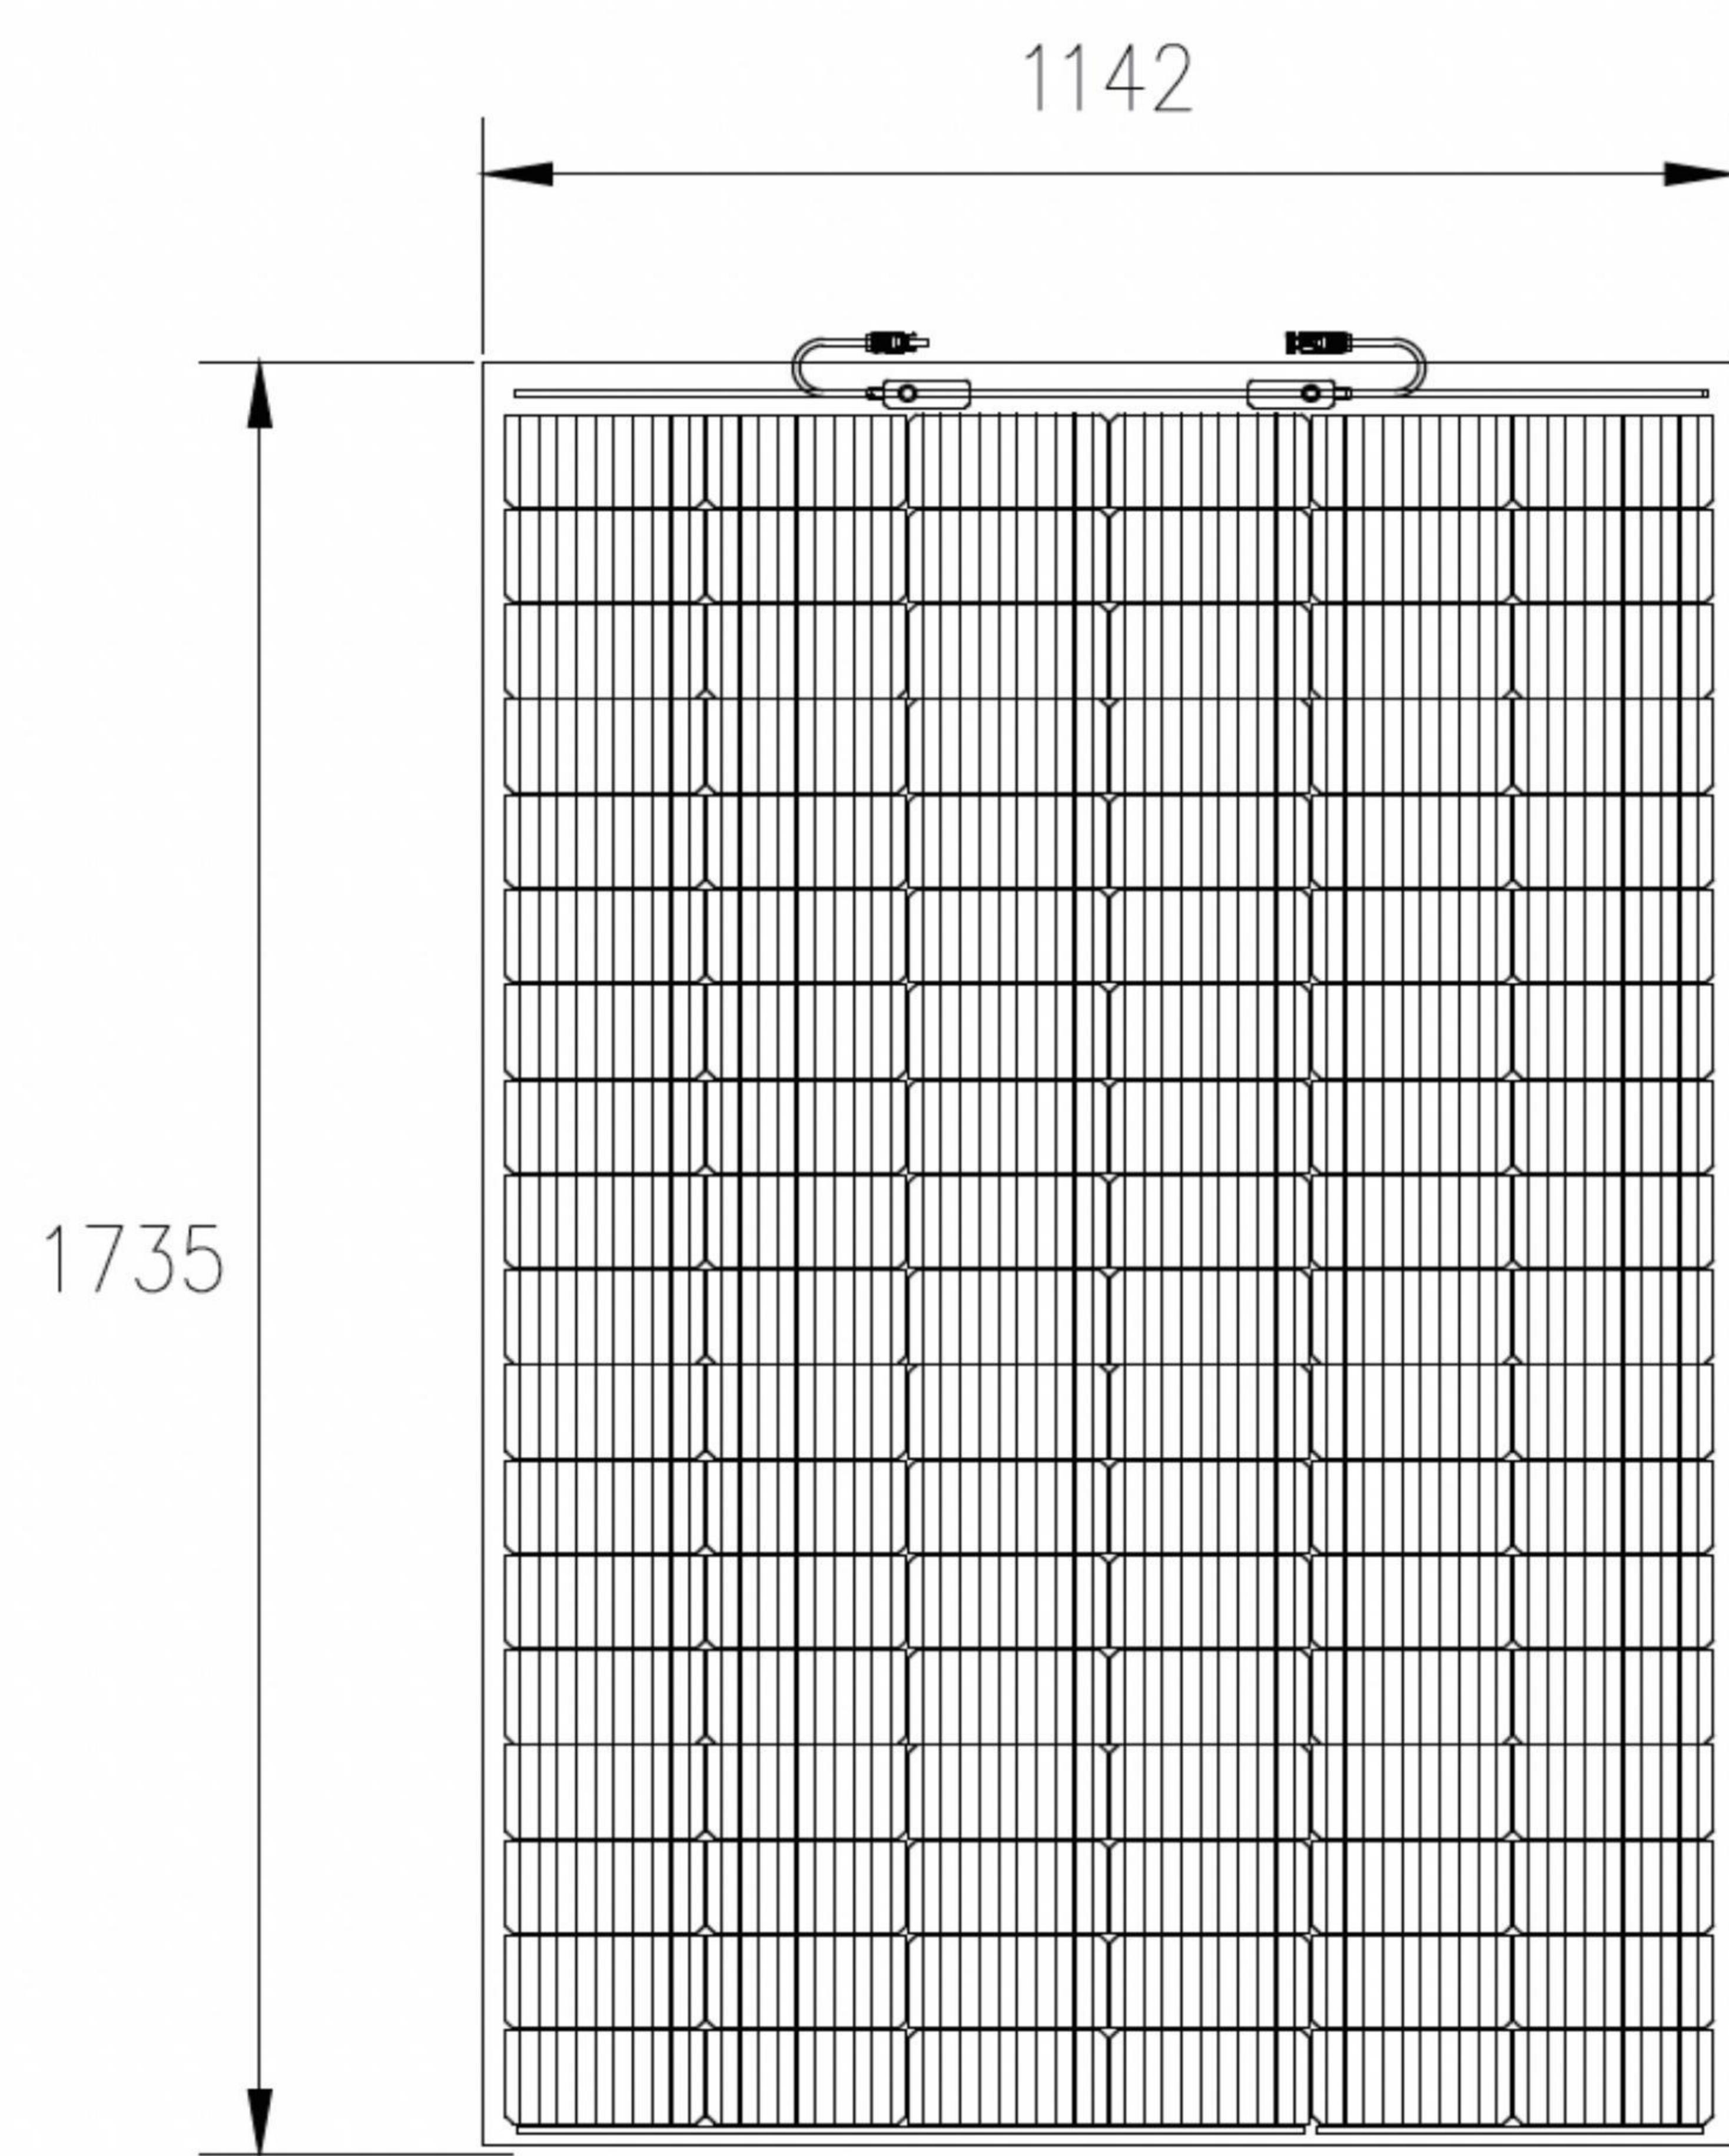

P-V Curves of PV Module

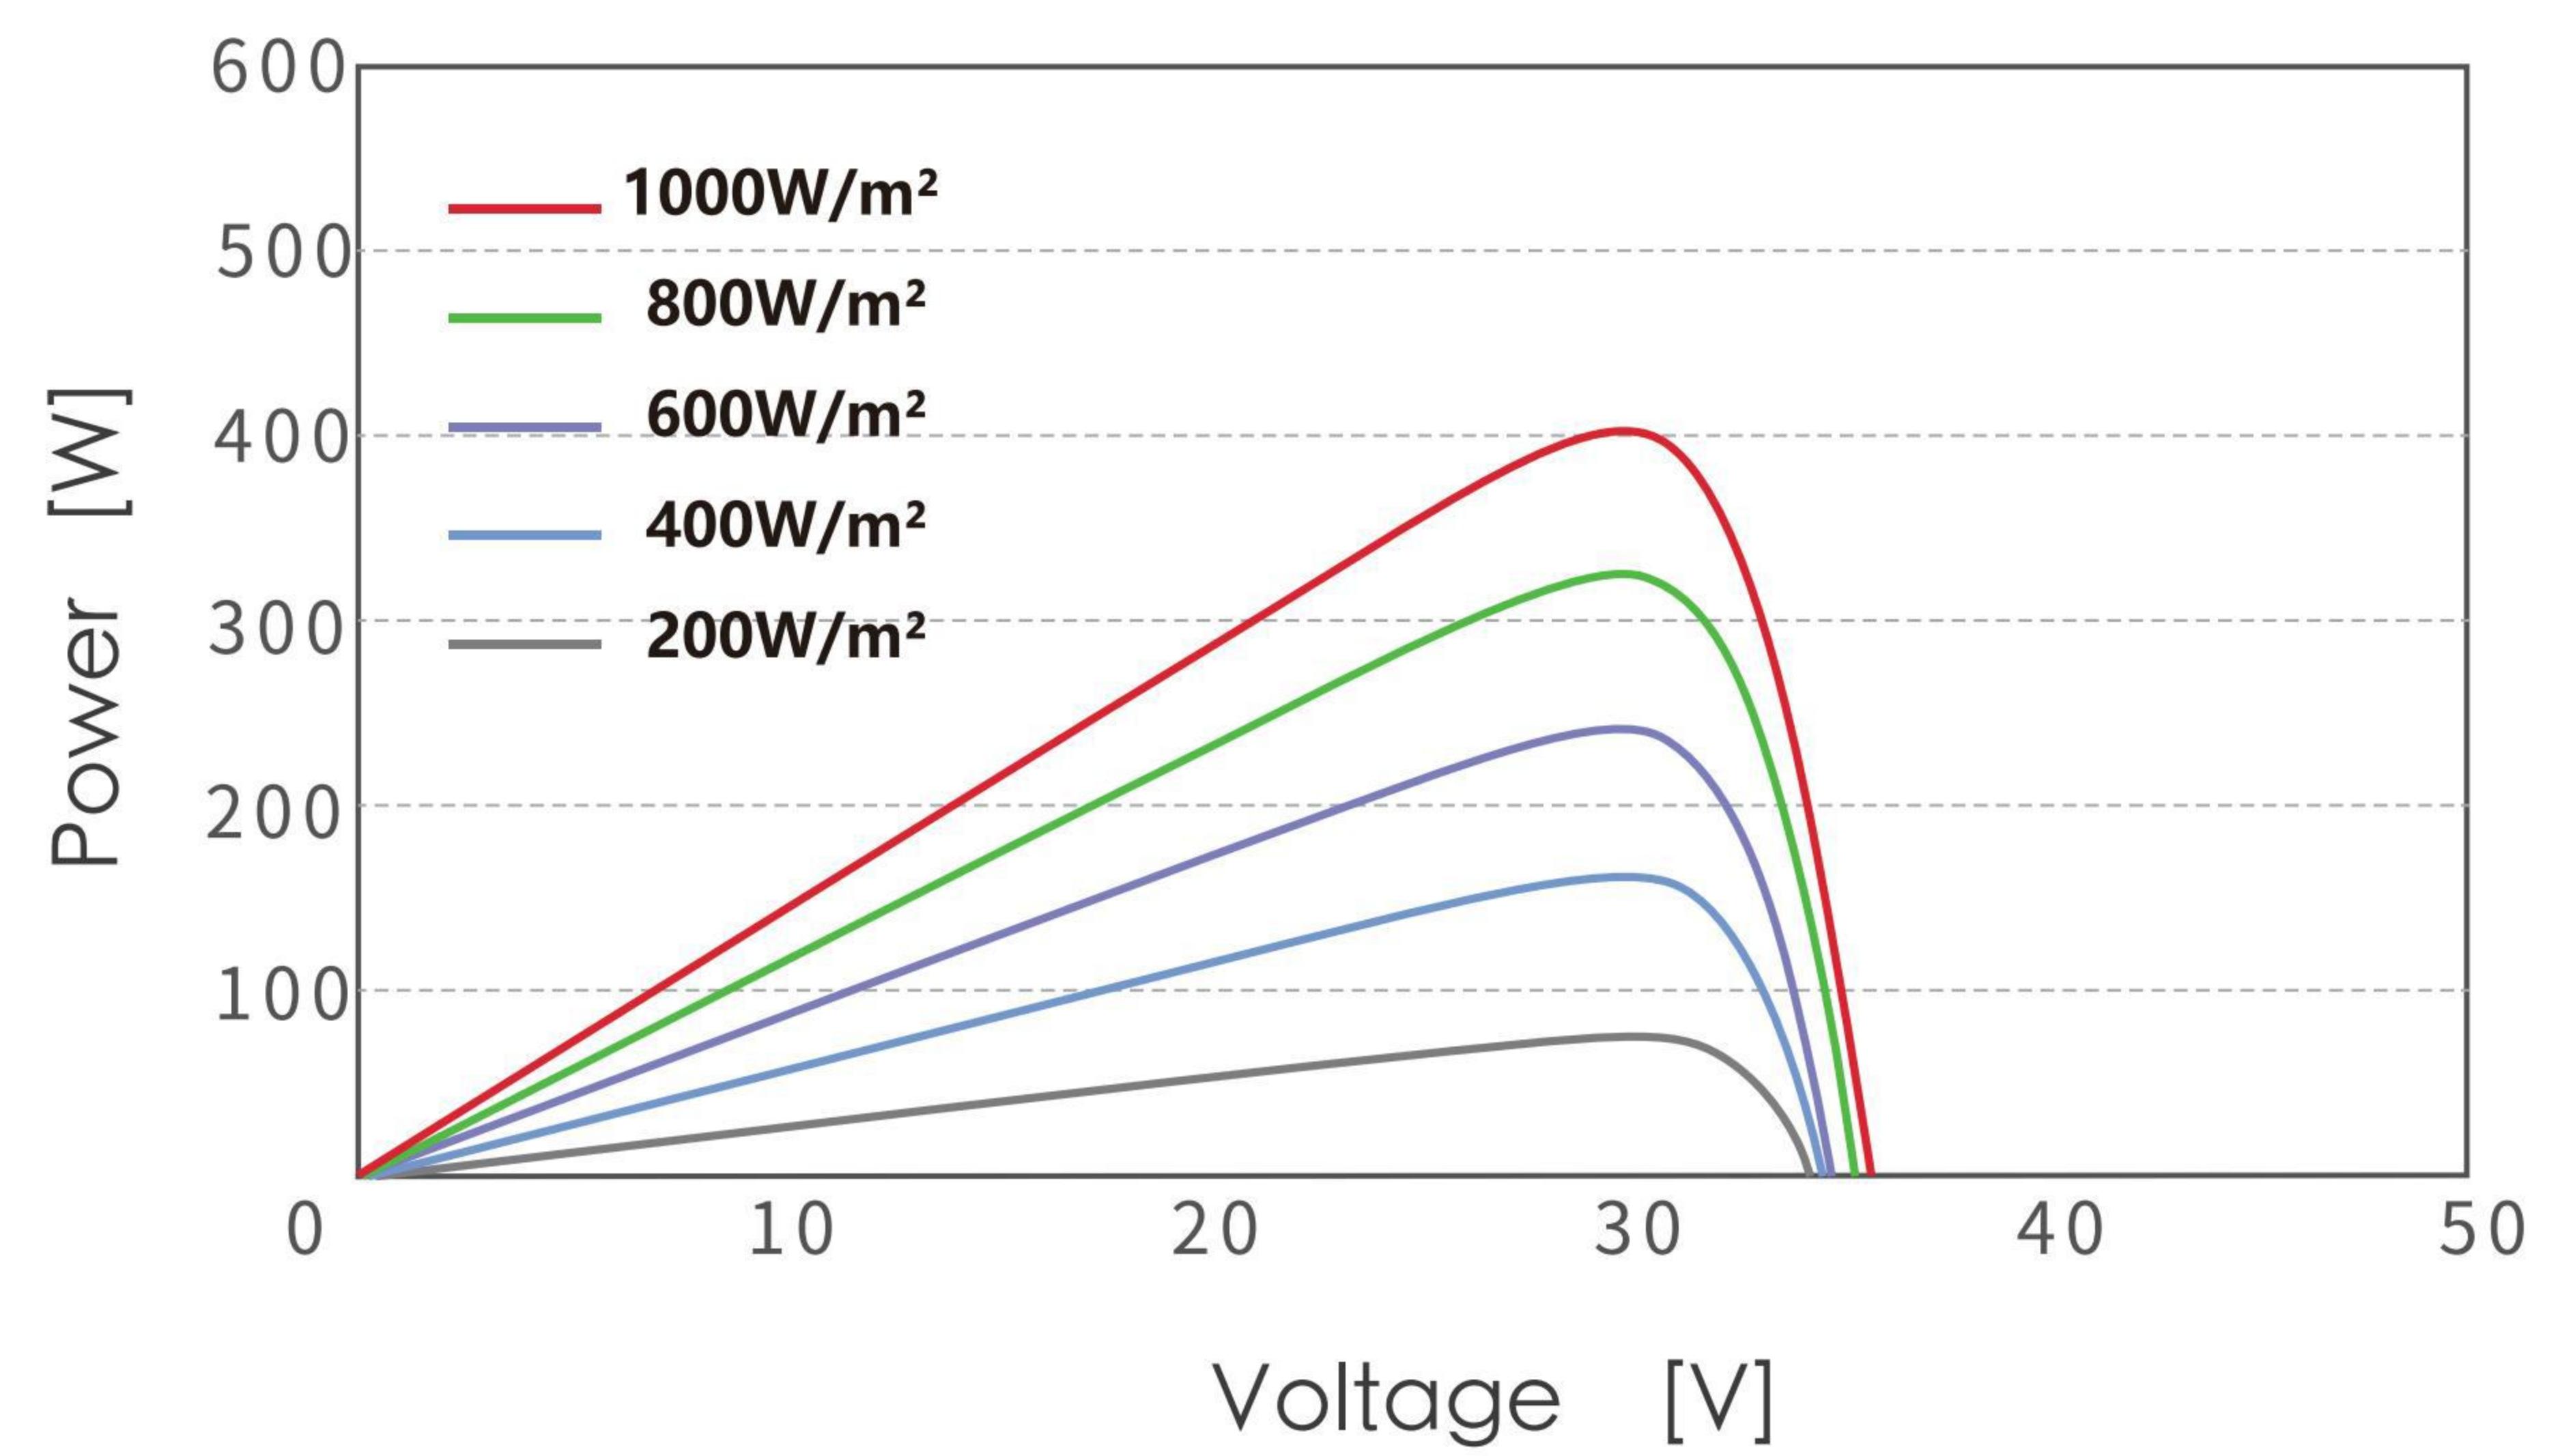

I-V Curves of PV Module

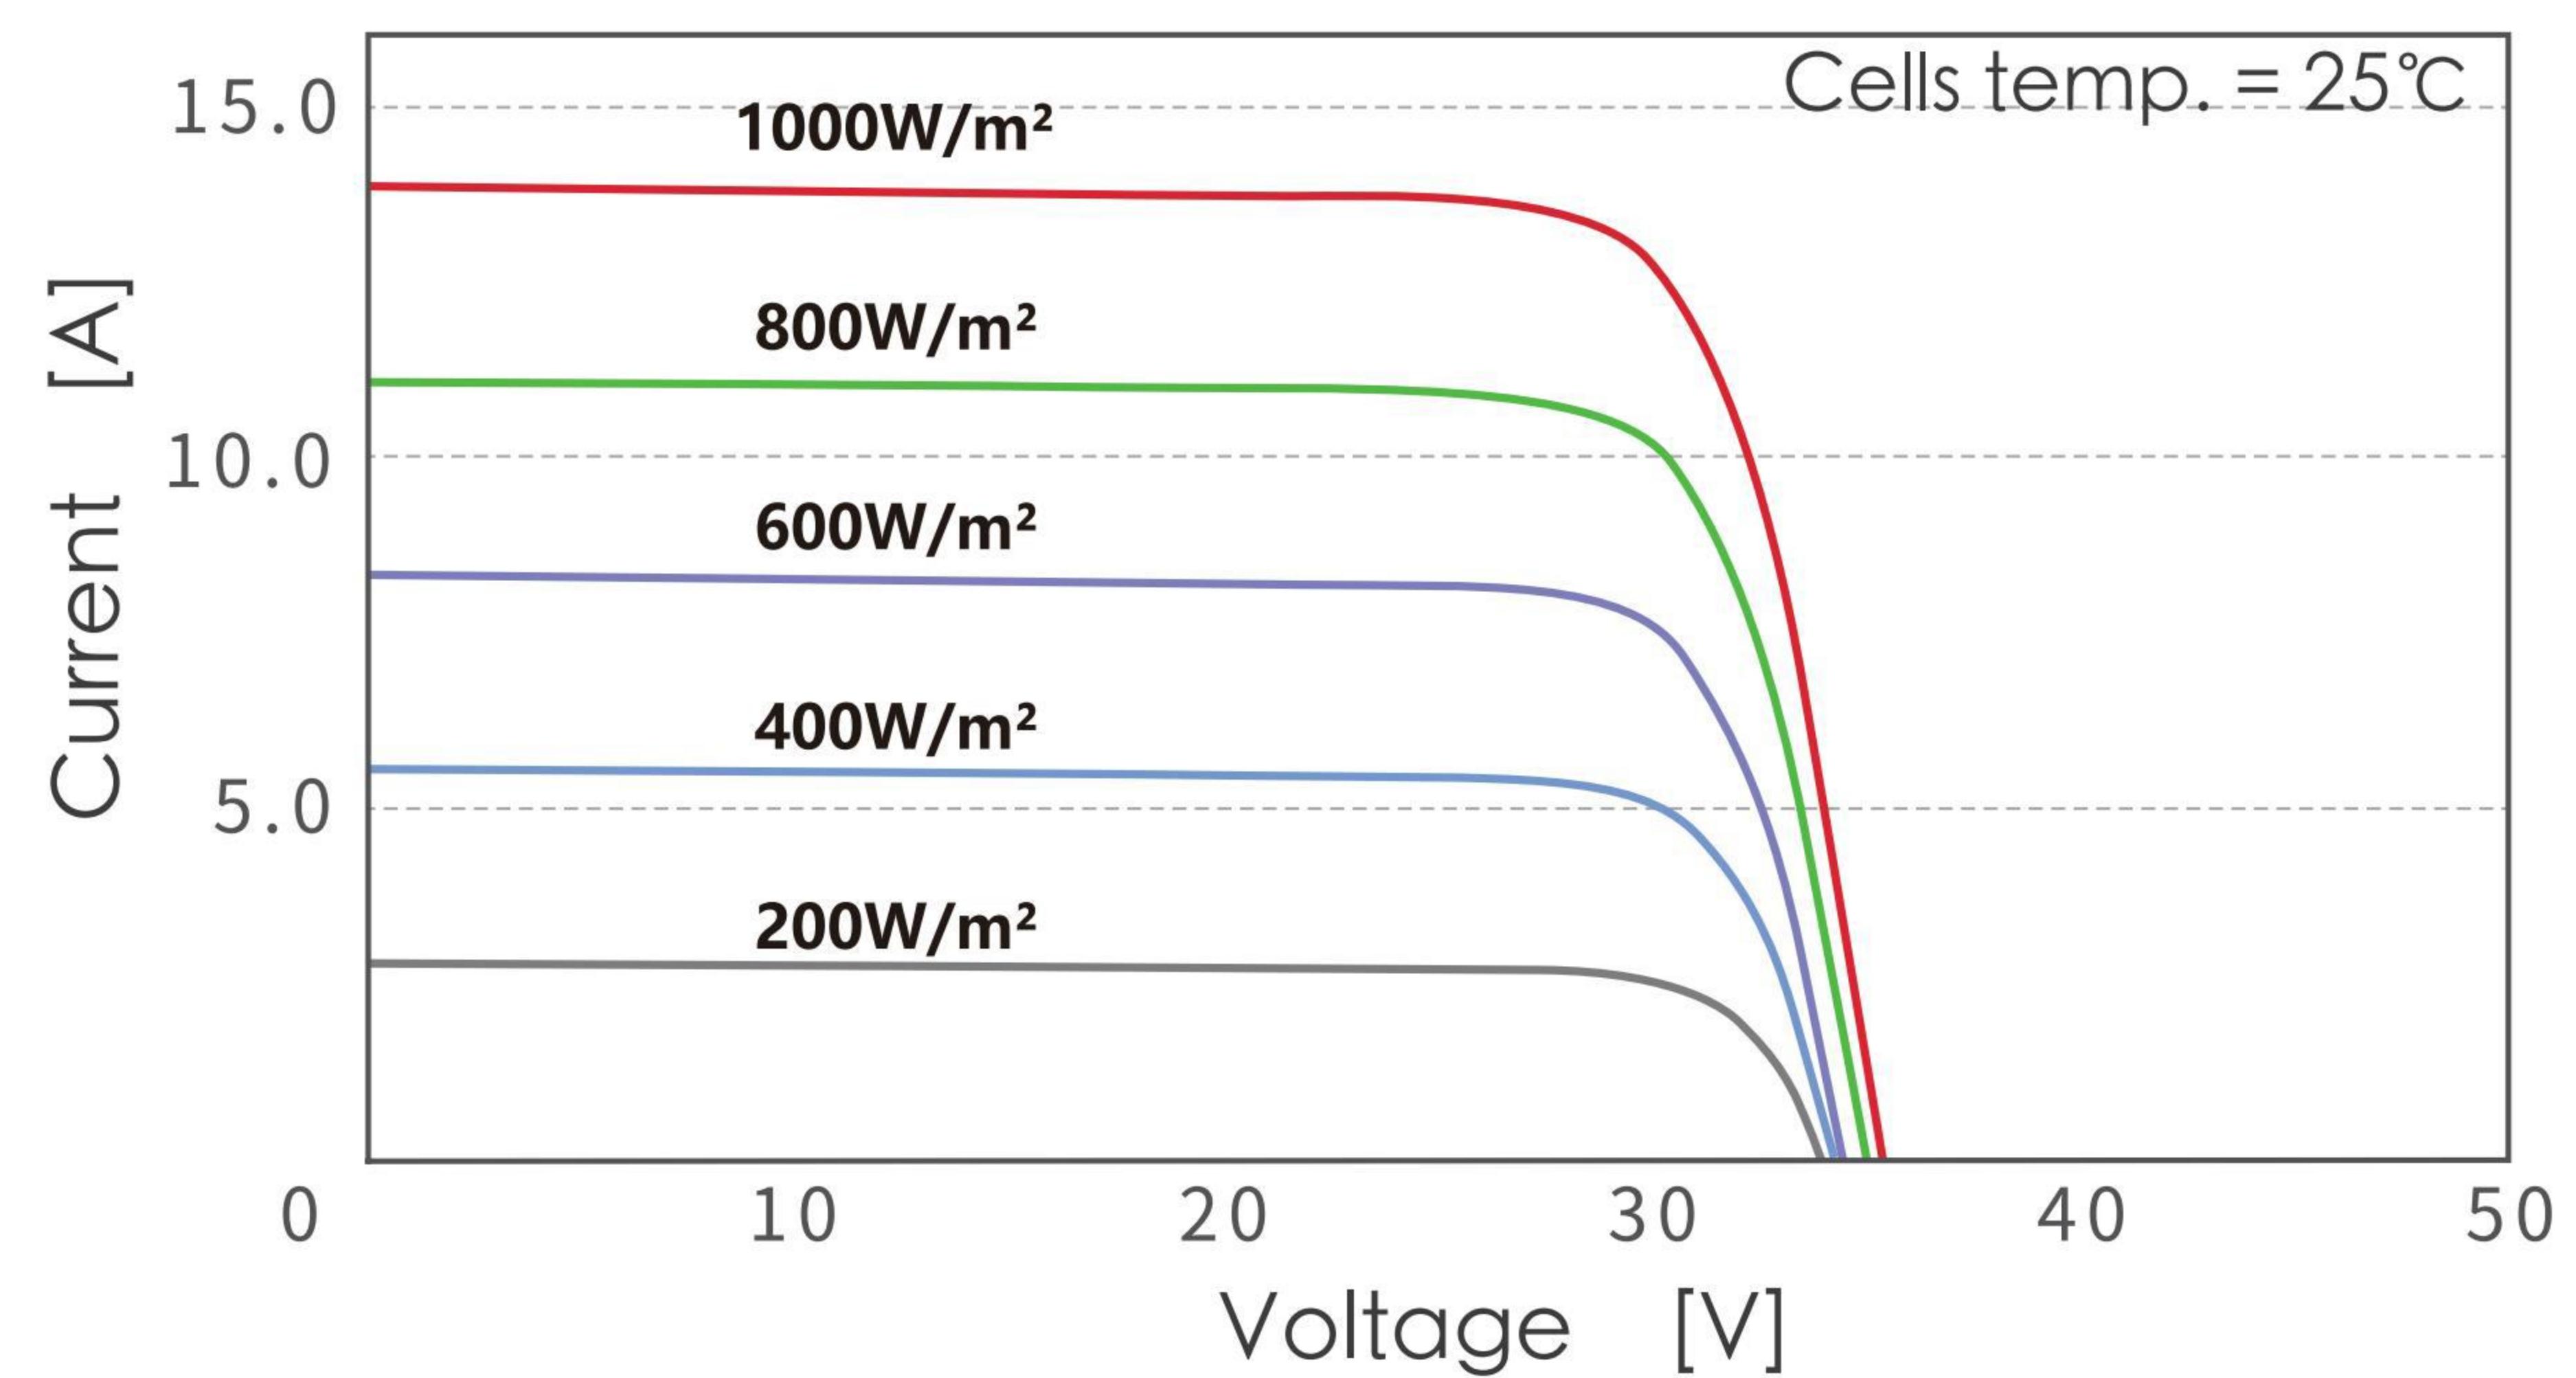

Electrical Parameter(STC)

Model	390M	395M	400M
Maximum power (W)	390	390	400
Working point voltage (V)	30.85	30.99	31.03
Working point current (A)	12.64	12.77	12.89
Open circuit voltage (V)	36.45	36.60	36.75
Short circuit current (A)	13.52	13.59	13.64
PV module efficiency	19.68%	19.94%	20.19%
Standard test conditions	Atmospheric quality Am1.5, Irradiance 1000w/ m², Cell Temperature 25°C		

Electrical Parameter(NMOT)

Model	390M	395M	400M
Maximum power (W)	285	288	292
Working point voltage (V)	27.20	27.40	27.60
Working point current (A)	10.48	10.51	10.58
Open circuit voltage (V)	34.60	34.70	34.80
Short circuit current (A)	11.03	11.08	11.13
NMOT conditions	The irradiance is 800w/ m², the ambient temperature is 20 degrees, and the wind speed is 1m/s		

Mechanical Parameters

Module size	1735*1142*4mm
Number of solar cells	108Cells (6*18)
Weight	7Kg ±5%
Junction Box	IP68, 2 diodes
Cables	4mm², 300mm, (Customizable)
Front plate	High light transmittance flexible polymer material
Frame	no frame
Colour	white or black

Packaging&Transport

40HQ container transport	36 Pcs/box × 26 box =936Pcs
--------------------------	-----------------------------

Temperature Parameter Maximum Ratings

NMOT	45±2°C	Working temperature	-40~+85°C
Temperature coefficient of maximum power(Pmax)	-0.35%/°C	Maximum system voltage	1500VDC
Temperature coefficient of open circuit voltage(Voc)	-0.28%/°C	Maximum fuse rated current	25A
Temperature coefficient of short circuit current(Isc)	+0.05%/°C		



All data contained in this specification are subject to change without prior notice. The final interpretation rights belong to Hunan Red Solar New Energy Science and Technology Co.,Ltd (202401V01)